
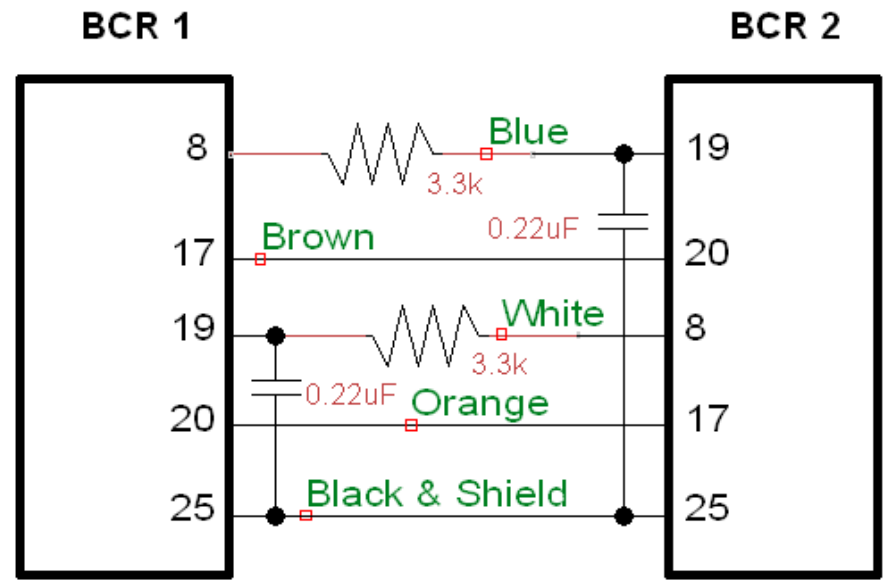


BCR to BCR Cable - 3 ft

BCR Pin Number	BCR Pin Function	Wire Color	BCR Pin Function	BCR Pin Number
8	Audio Out	Blue	Audio In	19
17	COR Out	Brown	PTT In*	20
19	Audio In	White	Audio Out	8
20	PTT In*	Orange	COR Out	17
25	GND	Black & Shield	GND	25

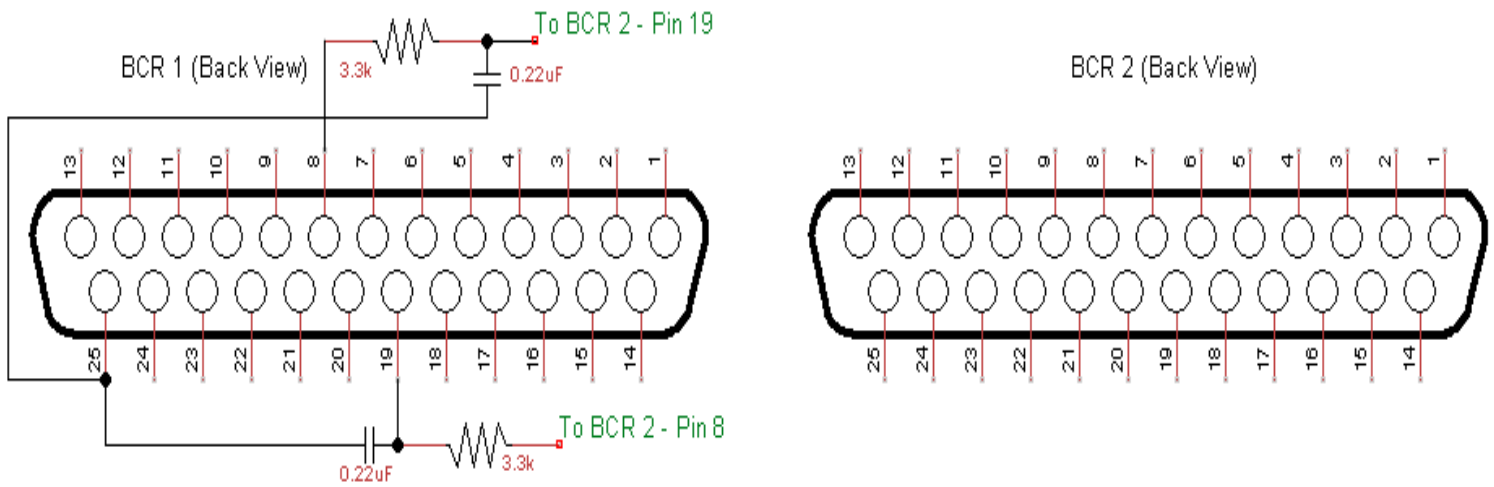

***Note - When the external PTT line is engaged, the BCR repeater will transmit with the settings configured in the User 1 slot. Refer to the BCR User manual (Page 8).**